
MARION COUNTY SURVEYOR'S OFFICE

DEBRA S. JENKINS MARION COUNTY SURVEYOR SECTION CORNER RECORD SEC. $14\,\mathrm{TWN}$. $17_{\,\mathrm{N}}$ RNG. $2_{\,\mathrm{E}}$

BRYAN F. CATLIN, PLS TECHNICAL SUPERVISOR

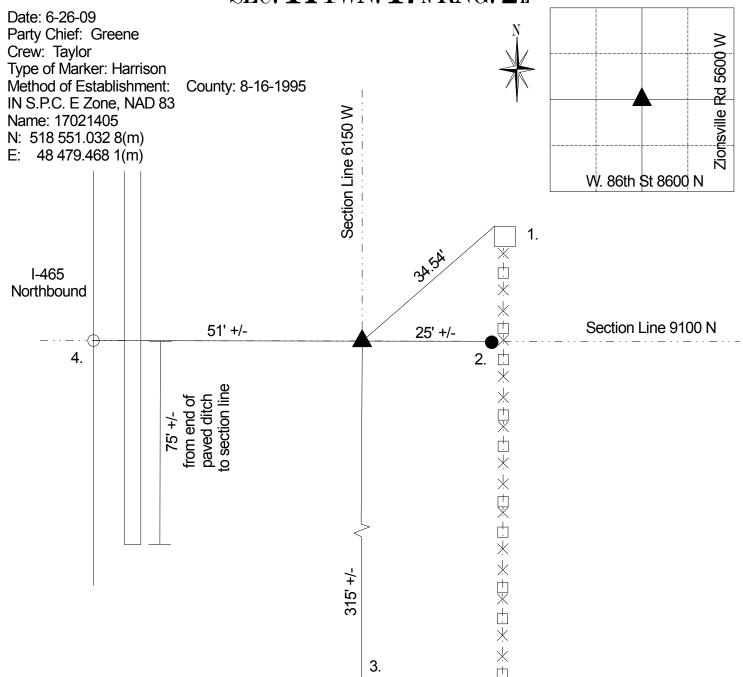

No record of stone nor witnesses per Marion County Atlas. G.W.S. 1-29-1964 called square cut stone. Miller 5-75 called a rebar. Excavated by Kiste 8-16-1995 and a 24" long 5/8" rebar was found per ties. Harrison set. Retied 4-23-2000 by Wilcoxen. Retied 6-26-09 by Greene.

REF.	DISTANCE	DESCRIPTION
1.	34.54'	NW corner of witness post at grade
2.	25' +/-	Due E to 3/4" capped rebar R/W section line
3.	315' +/-	Due S to 8" CMP over creek
4.	51' +/-	Due W to edge of pavement for I-465

Note: Corner is on E side of I-465 approximately 1/4 mile from end of on ramp

from exit #23

THIS CORNER POSITION
REPRESENTS A "TITLE" CORNER
AND MAY NOT NECESSARILY
REPRESENT THE POSITION BASED
ON RECORD CORNERS.